


APPLICATION

This harness is designed for work on ropes during extended-duration suspended interventions.

MODELS

Désignation	Code	Norme	Accrochage dorsal	Accrochage sternal	Accrochage thoracique	Accrochage latéral	Accrochage ombilical	STANDARD
			Accrochage antichute			Accrochage de maintien	Accrochage de suspension	
HT Promast™ S A XP	65242	S	1	1	-	2	1	
HT Promast™ M A XP	65252	M	1	1	-	2	1	
HT Promast™ XL A XP	65262	XL	1	1	-	2	1	

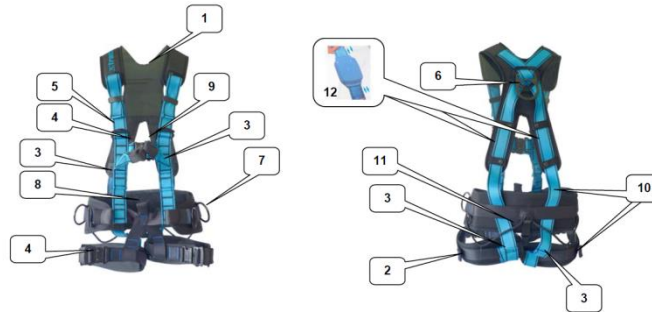

Component & characteristic

The harnesses come in three sizes: S / M / XL. The harnesses come equipped in their standard configuration with a back X-Pad and a clip for attachment of a work saddle

- 1 - X-Pad made of sealed closed-cell foam protected by a reinforced canvas cloth on the outer side and a honeycomb cloth on the inner side
- 2 - Mountaineering-type thigh straps
- 3 - Fall indicator on all anchorage points
- 4 - Closing buckles Automatic buckles made of black anodized aluminum and stainless steel
- 5 - Adjustment buckles. Buckles made of zinc-plated + black cataphoresis treated steel
- 6 - Back anchorage point : 65 mm back D-ring made of zinc-plated + black cataphoresis treated steel
- 7 - Belt anchorage points: Large-sized wide-bowed D-ring on work position holding belt
- 8 - Belly anchorage point: Polyester webbing loop ensuring higher user mobility
- 9 - Chest anchorage point: polyester webbing loop
- 10 - Webbing: Polyester, 45 mm, black and blue
- 11 - Tool and saddle
- 12 - Elastrac unit
- Weight of harness: 2.1 kg

Description

The HT Promast™ harness is designed to provide the user with a high degree of comfort when working in suspended positions, and thus allows extended-duration work in suspended positions.

Comfort is enhanced by:

- the back X-Pad,
- the mountaineering-type leg straps,
- the ergonomic belt.

The HT Promast harness comprises:

- 2 fall arrest anchorage points, back and chest,
- 1 belly suspension point,
- 2 work position holding points on either side of the belt.

The HT Promast™ harness is equipped with automatic closing buckles.

Optionally, the HT Promast™ harness can be equipped with Elastrac™ units allowing elongation of the harness shoulder straps to match the user's body and to stretch the webbing on each movement. The units ensure elongation of the webbing of up to 4 cm.

The accessories available for the HT Promast™ harness include the saddle as well as the accessories needed for rope ascensions: ascender handle, chest ascender, Jumar LSD lanyard and ascender pedal.

CE Certification

- n° 0082/352/160/12/13/0443
- Notified body : APAVE (N°0082)

Standard

- EN 361
- EN 358
- EN 813