


## APPLICATION

Work positioning belt. It must be used in combination with a work positioning lanyard.

This product is not suitable for protection against falls from a height. If there is a risk of falling, use a fall arrest system EN 363 in addition.

CE06 belts are available as flat buckles (CE06) and automatic buckles (CE06 A). They are connectable to fall arrest harnesses by the straps and assembly buckle. (fig 1)

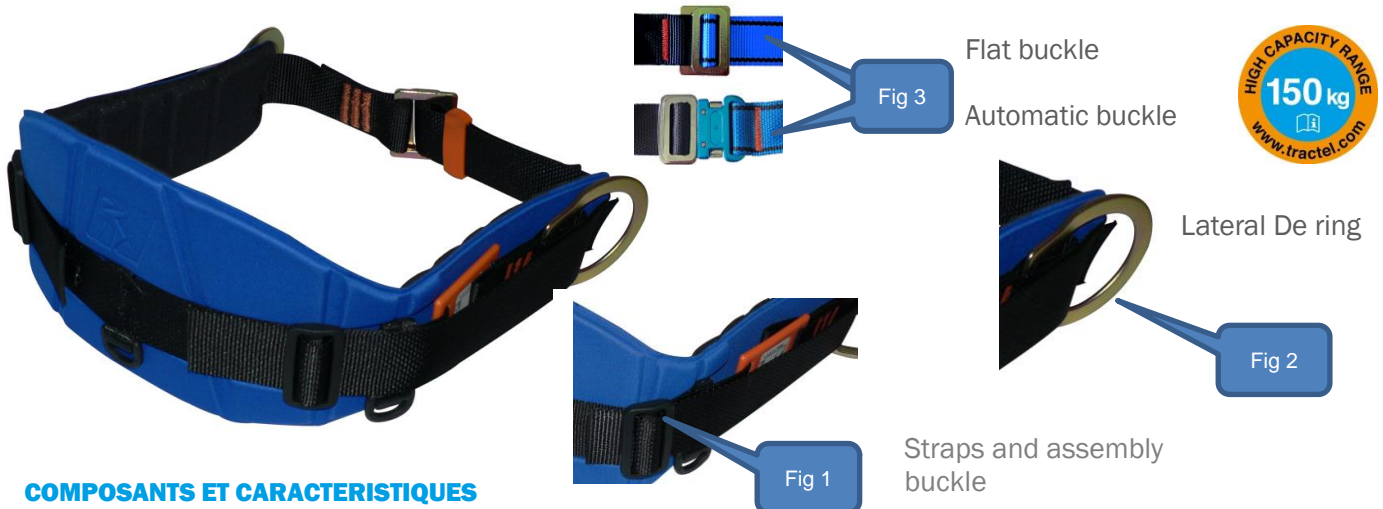

## COMPOSANTS ET CARACTERISTIQUES

- Lateral anchorage: two large opening loops locked in rotation on the belt strap (fig 2)
- Quick adjustment and opening by flat or automatic buckle (fig 3)
- Blue backrest in light foam and rot-proof on the outside, black terry fabric on the inside.
- Maximum operating load: 150 kg

## MATIERE

- Strap : polyester
- Buckle : zinc steel

Tableau des tailles 20 11 2017

	S	M	XL	XXL	XXXL
A	60 - 100	80 - 120	100 - 160	130 - 170	-
B	75 - 100	90 - 110	100 - 150	130 - 170	-
C	45 - 60	45 - 70	45 - 80	80-90	-
D	55 - 65	65 - 80	80 - 90	90 - 100	-

## CERTIFICATION CE

- Notified body : ALIENOR CERTIFICATION CE 2754
- N° : 2754/0352/160/08/19/0821

## MORMES

- EN 358 / 2018 – European standard

## MODELE

Code	Désignation	Size	ean
080242	CE06 S	S	3600230802428
080252	CE06 M	M	3600230802527
080262	CE06 XL	XL	3600230802626
080272	CE06 SA	S	3600230802725
080282	CE06 MA	M	3600230802824
080292	CE06 XLA	XL	3600230802923